

07/12/00

JCS73 U.S. PTO

09/14/99 09/14/99

07-13-00

A

+

07/12/00

Please type a plus sign (+) inside this box → ☐PTO/SB/05 (4/98)
Approved for use through 09/30/2000 OMB 0651-0032
Patent and Trademark Office U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

**UTILITY
PATENT APPLICATION
TRANSMITTAL**

(Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))

Attorney Docket No. J 2850

First Inventor or Application Identifier CLARK WOODY

Title See 1 in Addendum

Express Mail Label No. EJ484161819US

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

1. ☒ * Fee Transmittal Form (e.g., PTO/SB/17)
(Submit an original and a duplicate for fee processing)
2. ☒ Specification [Total Pages 19] 1
(preferred arrangement set forth below)
- Descriptive title of the invention
 - Cross References to Related Applications
 - Statement Regarding Fed sponsored R & D
 - Reference to Microfiche Appendix
 - Background of the invention
 - Brief Summary of the invention
 - Brief Description of the Drawings (if filed)
 - Detailed Description
 - Claim(s)
 - Abstract of the Disclosure
3. ☒ Drawing(s) (35 U.S.C. 113) [Total Sheets 6] 1
4. Oath or Declaration [Total Pages 2] 1
- a. ☒ Newly executed (original or copy)
 - b. ☐ Copy from a prior application (37 C.F.R. § 1.63(d))
(for continuation/divisional with Box 16 completed)
 - i. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting
inventor(s) named in the prior application,
see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).

* NOTE FOR ITEMS 1 & 13 IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY
FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT
IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).

ADDRESS TO:Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

5. ☐ Microfiche Computer Program (Appendix)
6. Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)
- a. ☐ Computer Readable Copy
 - b. ☐ Paper Copy (identical to computer copy)
 - c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

7. ☐ Assignment Papers (cover sheet & document(s))
8. ☐ 37 C.F.R. § 3.73(b) Statement ☒ Power of
(when there is an assignee) Attorney
9. ☐ English Translation Document (if applicable)
10. ☒ Information Disclosure ☒ Copies of IDS
Statement (IDS)/PTO-1449 Citations
11. ☐ Preliminary Amendment
12. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)
13. ☐ * Small Entity ☐ Statement filed in prior application
Statement(s) Status still proper and desired
(PTO/SB/09-12)
14. ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)
15. ☐ Other:

16. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No. _____ / _____
Prior application information: Examiner _____ Group / Art Unit: _____

For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

17. CORRESPONDENCE ADDRESS☐ Customer Number or Bar Code Labelor ☒ Correspondence address below

(Insert Customer No. or Attach bar code label here)

Name	Kristin L. Chapman				
	S. C. Johnson Home Storage, Inc.				
Address	1525 Howe Street, MS 077				
City	Racine	State	WI	Zip Code	53403-2236
Country		Telephone	262-260-2722	Fax	262-260-4253

Name (Print/Type)	Kristin L. Chapman	Registration No. (Attorney/Agent)	38,102
Signature	<i>Kristin L. Chapman</i>	Date	12 July 2000

Burden Hour Statement. This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231

[illegible][illegible]

**APPARATUS FOR AND METHOD OF SEVERING
AND SEALING THERMOPLASTIC FILM**

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates generally to an apparatus for and a method of severing and sealing thermoplastic film to make plastic bags or the like, and in particular to an apparatus and a method that utilize a combination of thermal energy and mechanical force to sever and seal the thermoplastic film.

2. Description of the Related Art

In the production of plastic bags, a continuous web of thermoplastic film typically is supplied to a bag-making machine that severs the film into segments and seals the severed edges of each segment to form a bag.

Referring to FIG. 1, a known bag-making machine is designated generally by reference numeral 10. The machine shown is a dual-lane bag-making machine. That is, two folded webs of thermoplastic film 22 are fed to the machine 10 in parallel, and the machine 10 severs and seals the parallel webs to form two sets of bags.

The bag-making machine 10 includes a continuously rotating seal drum 12 and a cam track assembly 14. Folded webs of thermoplastic film 22 are fed between the seal drum 12 and the cam track assembly 14. A plurality of clamping devices 16, such as disclosed in U.S. Patent No. 5,964,688, assigned to the same assignee as the present invention and incorporated herein by reference in its entirety, is mounted on the cam track assembly 14 for movement therearound. As best seen in FIG. 2, each clamping device 16 comprises a pair of parallel spring-mounted seal bars 18, separated by a gap 20.

The clamping devices 16 intermittently contact the film 22 and clamp it firmly against the seal drum 12. A cam-actuated, electrically-heated hot wire 24 advances

through an opening 26 in the surface of the seal drum 12, burns its way through the film 22, and moves into the gap 20 between the seal bars 18. In this way, the film 22 is severed into segments and the resulting severed edges are simultaneously sealed.

5 As shown in FIG. 3, a typical hot wire 24 consists of a relatively thin, elongated piece of electrically-conductive material stretched between supports 28 disposed on opposite sides of the effective cutting lengths 30 of the hot wire 24. To date, hot wires of various sizes and shapes have been used. For instance, some processes have employed hot wires having circular cross sections with diameters up to about 0.050 inches. Other processes have employed rectangular or wedge-shaped hot wires. Such conventional hot wires generally are heated to temperatures between 100-1400°F.

10 Several problems exist in the production of plastic bags using conventional bag-making machines such as that described above. For example, as the hot wire burns its way through the film, a significant amount of smoke is produced. Some of this smoke condenses on components of the machine, leaving behind a wax residue. On an almost daily basis, the machine must be shut down and the components cleaned in order to remove the wax buildup. Another problem with conventional bag-making machines is that the relatively thin, high-temperature hot wires often fail due to the stress of repeated severing and sealing operations. Replacing broken wires requires additional downtime for the machine and results in a further reduction in productivity.

20 Accordingly, there is a need in the art for an improved apparatus for and method of severing and sealing thermoplastic film to form plastic bags or the like.

25 There is a further need for such an apparatus and method that reduce the amount of wax that accumulates on the components of the apparatus.

There is a still further need for such an apparatus and method wherein the hot wire used to sever and seal the film will not easily break when subjected to repeated severing and sealing operations.

SUMMARY OF THE INVENTION

The present invention addresses the foregoing needs in the art by providing an apparatus for and a method of severing and sealing thermoplastic film that utilizes a cutting edge implement heated to a lower temperature than hot wires utilized in conventional bag-making machines, and that applies a combination of thermal energy and mechanical force to sever and seal the film.

In a first aspect of the present invention, a method of severing and sealing a film formed of a thermoplastic material includes heating a cutting edge implement to a temperature sufficient to melt but not to burn the thermoplastic material, feeding a plurality of layers of the film between the cutting edge implement and an opposing surface, and moving the cutting edge implement and the opposing surface relative to one another to pinch the plurality of layers of film therebetween. Thereafter, any relative lateral movement between the cutting edge implement, the film, and the opposing surface is suspended, while the cutting edge implement and the opposing surface are relatively biased together with the plurality of layers of film pinched therebetween, until the cutting edge implement cuts through the plurality of layers of film, contacts the opposing surface, and seals the plurality of layers of film together.

In another aspect, a method of severing and sealing a film includes clamping the film between opposing surfaces, heating a cutting edge implement to a temperature sufficient to melt but not to burn the film, and moving the cutting edge implement past one of the opposing surfaces toward the other surface so that the cutting edge implement presses against the film toward the other surface for a period of time sufficient to sever the film and seal the resulting severed edges.

In still another aspect, an apparatus for severing and sealing a film formed of a thermoplastic material includes a cutting edge implement that is heatable to a temperature sufficient to melt but not to burn the thermoplastic material, an anvil, and means for feeding a plurality of layers of the film between the cutting edge implement and the anvil. The apparatus further includes means for moving the cutting edge implement and the anvil relative to one another to pinch the plurality of layers of film therebetween, and means for suspending any relative lateral movement between the cutting edge implement, the film, and the anvil, while

pressing the cutting edge implement toward the anvil with the film pinched therebetween, until the cutting edge implement melts through the plurality of layers of film, contacts the anvil, and seals the plurality of layers of film together.

In a further aspect, a method of severing and sealing a film formed of a thermoplastic material includes pinching a plurality of layers of the film between a substrate and a cutting edge implement that is heated to a temperature sufficient to melt but not to burn the thermoplastic material, and pressing the cutting edge implement toward the substrate with the plurality of layers of film pinched therebetween, until the cutting edge implement melts through the plurality of layers of film, contacts the substrate, and seals the plurality of layers of film together.

In each of these aspects, it is preferred that the cutting edge implement be a hot wire. Preferably, the hot wire is supported along substantially its entire effective cutting length.

A better understanding of these and other objects, features, and advantages of the present invention may be had by reference to the drawings and to the accompanying description, in which there are illustrated and described preferred embodiments of the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a perspective view of a conventional bag-making machine.

FIG. 2 is a cross-sectional view of a typical hot wire assembly and opposing clamping device utilized in the bag-making machine of FIG. 1.

FIG. 3 is a cross-sectional view taken along cross section line 3-3 in FIG. 2.

FIG. 4 is a perspective view of a severing and sealing apparatus according to a preferred embodiment of the present invention.

FIG. 5 is a cross-sectional view of a cutting assembly and opposing anvil assembly utilized in the severing and sealing apparatus of FIG. 4.

FIG. 6 is a cross-sectional view taken along cross section line 6-6 in FIG. 5.

Throughout the figures, like reference numerals have been used for like or corresponding parts.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

For illustrative purposes, the severing and sealing apparatus and method of the present invention are described in connection with the production of plastic bags made from a folded web of polyethylene film (by way of example, but not limitation, either completely low density or a blend of low density and linear low density, depending on the desired bag parameters). In forming such bags, the film is typically folded such that it is closed along one edge and open along the other. Mating zipper elements (or other suitable closure mechanisms) are provided along the open edge. The closed (or folded) edge can further be folded inward to form a pleat. Thus, the web is four plies thick near the closed edge, and two plies thick near the open edge (plus the thickness of the zipper elements). The web is severed and sealed transversely to form the lateral edges of the bags.

The present invention also can be utilized in the production of bags made from other thermoplastic materials, such as polypropylene or the like, as well as in the production of bags from films of varying thicknesses, or from webs having different configurations (such as webs having fewer or more layers, webs incorporating zipper elements, slider closure mechanisms, drawstrings, etc.), or even from multiple webs stacked on top of one another (e.g., back-to-back bags) or nested within each other (e.g., a bag-in-a-bag).

The severing and sealing apparatus and method of the present invention represent improvements over the known bag-making machines and methods discussed above. The improvements include, among others, replacing the spaced seal bars with one-piece anvils, replacing the relatively thin, high-temperature hot wires with larger, lower-temperature cutting edge implements, and supporting the cutting edge implements for substantially their entire lengths.

Referring to FIG. 4, a severing and sealing apparatus according to a preferred embodiment of the present invention is designated generally by reference numeral 100. The apparatus shown is a dual-lane severing and sealing apparatus. That is, two folded webs of polyethylene film are fed to the apparatus in parallel, and the apparatus severs and seals the parallel webs to form two sets of bags. The

severing and sealing apparatus of the present invention readily can be adapted for use in a single-lane or other multiple-lane production line.

In a preferred embodiment, the severing and sealing apparatus 100 generally comprises a continuously rotating cylindrical seal drum 102 and a generally kidney-shaped cam track assembly 104, comprising a pair of opposing anvil cam tracks. The anvil cam tracks run parallel to the seal drum 102 for approximately one-third of the circumference of the seal drum 102. A plurality of anvil assemblies 106 is mounted at spaced intervals around the cam track assembly 104 for movement on the anvil cam tracks. The anvil assemblies 106 are interconnected by one or more chains (not shown) so that they can be commonly driven.

The anvil assemblies 106 move around the cam track assembly 104 at approximately the peripheral speed of the rotating seal drum 102. Preferably, the seal drum 102 and anvil assemblies 106 are commonly driven by a known motor and gear train (not shown). Any of a number of other known mechanisms can similarly be used to rotate the seal drum 102 and to move the anvil assemblies 106 around the cam track assembly 104. Alternatively, the seal drum 102 and anvil assemblies 106 can be driven by separate devices.

Referring to FIG. 5, continuous folded webs of polyethylene film 108 are fed between the seal drum 102 and the cam track assembly 104 of the severing and sealing apparatus 100 by known means, such as feed rollers (not shown) or the like. The seal drum 102 and anvil assemblies 106 together clamp the film 108 and advance it through the severing and sealing apparatus 100.

The seal drum 102 includes a plurality of cutting assemblies 114 reciprocally mounted at spaced intervals around the interior of the seal drum 102. The spacing between the cutting assemblies 114 and the spacing between the anvil assemblies 106 correspond, so that each cutting assembly 114 registers with a respective anvil assembly 106 for a distance as the seal drum 102 rotates and the anvil assemblies 106 move around the cam track assembly 104. Each cutting assembly 114 includes a reciprocally-mounted cutting edge implement, preferably an elongated hot wire 110, which is heated. The hot wire 110 is intermittently advanced through a respective opening 112 in the surface of the seal drum 102 to contact the film 108

and press it against an opposing anvil assembly 106. The film 108 remains pinched between the hot wire 110 and the anvil assembly 106 until the hot wire 110 melts through the layers of the film 108, contacts the anvil assembly 106, and seals the layers of the film 108 together.

5 Each hot wire 110 is held taut and is electrically coupled at either end, and is also preferably supported for substantially its entire length by an electrically- and thermally-insulating material. The hot wire 110 preferably has a larger cross section than conventional hot wires, and is maintained at a temperature that will melt, but not burn, the film 108.

10 The structure of a preferred cutting assembly 114 is explained below with reference to FIGS. 5 and 6. The hot wire 110 is coupled at each end to an end-clip finger 116 by a screw or the like. The hot wire 110 and the end-clip fingers 116 preferably are constructed of electrically-conductive materials. Most preferably, the hot wire 110 is made of a high-nickel content alloy, such as Inconel®, Monel®, Hastello®C, or the like, and the end-clip fingers 116 are made of cold-rolled steel.

15 A suitable electrical source (not shown) supplies electrical current to the hot wire 110 via electrical leads (not shown) coupled to the end-clip fingers 116.

Alternatively, the leads could be directly connected to the hot wire 110, in which case the end-clip fingers 116 would not need to be electrically conductive.

20 Moreover, the hot wire 110 could be heated by other means, such as embedded cartridge heaters, radiation, or the like.

25 Enough current (or other form of energy) is supplied to the hot wire 110 to heat it to an elevated temperature at which the polyethylene film 108 will melt, but not burn. The inventors have found that heating the hot wire 110 to a temperature of about 800° F or lower will avoid burning the polyethylene film 108, and consequently, will not cause any substantial accumulation of wax on the components of the apparatus 100. Preferably, the hot wire 110 is heated to a temperature between about 600° F to about 800° F. Of course, those of ordinary skill in the art will understand that the effective temperature range will vary according to the type of thermoplastic film, the thickness of the film, the dwell time during which the hot wire contacts the film, and the pressure exerted on the film by the hot wire.

30

For example, for a particular film having a given thickness, a lower-temperature hot wire will typically require a relatively longer period of contact with the film and/or a greater exertion of pressure on the film in order to sever and seal the film.

In a preferred embodiment, the hot wire 110 is approximately 0.050 inches wide by approximately 0.250 inches tall. The leading edge of the hot wire 110 that is used to sever and seal the polyethylene film 108 is rounded, having a radius of 0.025 inches. A rounded leading edge is preferred because it sufficiently concentrates the cutting force, yet does not dissipate heat to the ambient to the extent that a sharply-pointed leading edge would. By increasing the cross section of the hot wire 110 (compared to known devices) and supporting it for substantially its entire length, the hot wire 110 of the present invention is rendered considerably more durable than conventional hot wires.

One skilled in the art will appreciate that hot wires of different shapes could be employed, for example, hot wires having circular, elliptical, square, rectangular, wedge-shaped, or other profiles. Moreover, hot wires having larger or smaller cross-sectional areas could be used, provided the cross-sectional area of the hot wire is large enough to store a sufficient amount of thermal energy to sever and seal the film, yet small enough that the hot wire can be efficiently heated with a reasonable input of energy.

In a preferred embodiment, the hot wire 110 rests in a groove formed in an electrically- and thermally-insulating insert 118, preferably made of Cogetherm™ 505 mica. Alternatively, the insert 118 can be constructed of other insulating materials, such as, for example, ceramic, glass, or another form of mica. The insert 118, in turn, is fitted into a groove formed in a hot wire base member 120, preferably made of grade G7 Garolite™, a woven glass fabric which is laminated together with a silicone resin. Alternatively, the base member 120 can be made of Teflon®, hardwoods, phenolics, or high-temperature resistant plastics. The hot wire 110 can extend across the paths of both webs in the dual-lane apparatus. Between the effective cutting lengths 124 of the hot wire 110, a center cap 122 is mounted over both the hot wire 110 and the insert 118 to secure the hot wire 110 and the insert 118 to the hot wire base member 120.

The hot wire base member 120 is mounted on a hot wire superstructure 126 by screws or the like. Preferably, the hot wire superstructure 126 is constructed of aluminum or a comparable lightweight and rigid material. The end-clip fingers 116 are spring mounted at opposite ends of the hot wire superstructure 126 and can slide toward and away from one another. Thus, the end-clip fingers 116 maintain the hot wire taut regardless of expansion and contraction of the hot wire 110 caused by temperature fluctuations.

The hot wire superstructure 126 is mounted near opposite ends thereof to a pair of follower arms 128. Each follower arm 128 comprises an upper and a lower arm 164, 166, held together by shoulder bolts (not shown) and biased apart a relatively small distance by a compression spring 168. In a preferred embodiment, each spring 168, when compressed, exerts a force of about 54 lbf. Thus, the springs 168 of each cutting assembly 114 are capable of exerting a collective force of about 108 lbf.

Each lower follower arm 166 includes a cam follower 130, adapted for movement along a respective cam track 132. As the seal drum 102 rotates, the cam followers 130 move along the cam tracks 132, thereby reciprocating the cutting assemblies 114 radially inward and outward. The cam tracks 132 are designed such that each hot wire 110 is extended through a respective opening 112 in the surface of the seal drum 102 for approximately one-third of each revolution of the seal drum 102 (during which the anvil cam tracks of the cam track assembly 104 run parallel to the seal drum 102), and retracted within the interior of the seal drum 102 for the remainder of each revolution.

In the preferred embodiment shown, the cutting assemblies 114 are reciprocated using a cam arrangement. However, one skilled in the art will appreciate that other arrangements are possible. For example, a linear actuator, pneumatic or hydraulic cylinder, solenoid, or the like could be employed to reciprocate the cutting assemblies 114.

In the preferred embodiment described above, the heated cutting edge implement is a hot wire 110, preferably supported for substantially its entire effective cutting lengths 124 by an insulating material, and preferably made of a high-nickel

content alloy. The heated cutting edge implement can be constructed of any
heatable material, however, and need not necessarily be supported for substantially
its entire length. In addition, the heated cutting edge implement can be heated
either continuously or intermittently. Thus, any heated cutting edge implement that
is used to sever and/or seal thermoplastic film, such as hot wires, hot knives, heating
bars, and the like, falls within the broad scope of the invention.

The structure of a preferred anvil assembly 106 is explained with reference to
FIGS. 5 and 6. Each anvil assembly 106 includes a pair of spring-loaded anvils 134
(one corresponding to each cutting length 124 of the hot wire 110) that contact the
film 108 and clamp it against the seal drum 102. Preferably, each anvil 134
comprises a block of silicone rubber 136 having a strip of Teflon® tape 138 applied
thereto. The Teflon® tape 138 helps to prevent the film 108 from adhering to the
silicone rubber block 136.

Due to the combined spring force of the springs 168, each cutting assembly
114 preferably exerts a maximum force of about 108 lbf on an opposing anvil
assembly 106. For this particular load, the inventors have found that a silicone
rubber block having a hardness of 70 durometers is preferred. However, those
skilled in the art will understand that softer or harder rubbers or other materials also
could be used for the block, provided the selected material does not readily deform
when subjected to the given load.

Each anvil 134 is mounted on a plate 140, preferably made of aluminum. The
plate 140 is bracketed to an anvil base member 142, also preferably made of
aluminum. The plate 140 is easily detachable from the anvil base member 142 to
permit simple replacement of worn or damaged anvils 134. Two anvil base
members 142 are mounted on an anvil superstructure 144, which is itself mounted
on the cam track assembly 104 for movement thereabout.

The anvil superstructure 144 contains a number of holes 148, each of which
has a slide pin 150 press-fitted or bolted therein. Each slide pin 150 extends out of
the hole 148 and through a bushing 152 countersunk within a corresponding hole
146 in a respective anvil base member 142. A compression spring 154 interposed
around each slide pin 150 biases the anvil superstructure 144 and the anvil base

member 142 apart. In the preferred embodiment shown, four slide pins 150 and four springs 154 are used to mount each anvil base member 142, with one slide pin 150 and one spring 154 employed near each respective corner of the anvil base member 142. Motion limiters can be provided to prevent the anvil superstructure 144 and the anvil base member 142 from completely disengaging.

Additionally, tooling ball stems 156 (one or more corresponding to each anvil base member 142) are press-fitted or bolted in holes 158 in the anvil superstructure 144. Each stem 156 terminates in a tooling ball 160, which is received in a sleeve 162 located in or near the center of a respective anvil base member 142. The tooling ball 160 provides a point (or if two tooling balls are used, an axis) about which a respective anvil base member 142 can pivot. Thus, the anvil base members 142 are able to pivot independently about a respective tooling ball 160, enabling each anvil base member 142 to tilt as needed in order to clamp the film 108 firmly against the seal drum 102.

The anvil assembly springs 154 preferably are strong enough to resist the compressive force exerted by the hot wire 110 as it presses the film 108 against the anvils 134, yet are sufficiently elastic to permit the anvils 134 to properly align with the seal drum 102 during the clamping process. As noted, in a preferred embodiment, each cutting assembly 114 is capable of exerting a maximum force of about 108 lbf on an opposing anvil assembly 106. The inventors have found that anvil assembly springs 154 capable of exerting a collective force of about 112 lbf (14 lbf per spring) are satisfactory for this purpose.

The operation of the severing and sealing apparatus 100 will next be described.

A continuous folded web of, for example, polyethylene film 108, is fed to the apparatus 100 between the rotating seal drum 102 and counter-rotating anvil assemblies 106. One of the anvils 134 contacts the film 108 and clamps it firmly against the seal drum 102. Meanwhile, one of the hot wires 110 is advanced through a respective opening 112 in the surface of the seal drum 102 and contacts the film 108, thereby sandwiching the film 108 between the hot wire 110 and the opposing anvil 134. Thereafter, the hot wire 110 moves laterally in synchronization

with the film 108 and the anvil 134, while the film 108 remains pinched between the hot wire 110 and the anvil 134 for a period of time sufficient to sever the film 108 and seal the resulting severed edges. This period of time is commonly referred to as the dwell time. The inventors have found that a dwell time of approximately one second, together with the exertion of about 108 lbf on the film 108 by the hot wire 110, is sufficient to sever and seal the film 108 using a hot wire 110 heated to a temperature between about 600° F to about 800° F. The dwell time, contact pressure, and hot wire temperature may be manipulated to arrive at other combinations that will effectively sever and seal the film, but not burn it, all of which fall within the broad scope of the invention. In this regard, one of ordinary skill in the art will appreciate that the dwell time readily can be varied simply by adjusting the rotational speed of the seal drum 102 and anvil assemblies 106, and that the contact pressure can be varied by using fewer or more springs 154, 168, or by using springs having lower or higher compressive strengths.

After the film 108 is severed and sealed, the hot wire 110 is retracted within the interior of the seal drum 102 for the remainder of the drum revolution, before again being advanced through the opening 112 in the seal drum 102 to sever and seal another segment of the film 108. While the hot wire 110 is retracted within the interior of the seal drum 102, it reheats to the desired elevated temperature to make up for heat dissipated in the severing and sealing process. The resulting bags are temporarily retained on the seal drum 102 by a vacuum, before being transferred to another piece of equipment, such as, for example, a transfer drum (not shown).

One of ordinary skill in the art will appreciate that numerous variations on the particular embodiments described above are possible, and that such variations fall within the scope of the present invention. For example, the track assembly and seal drum could have any number of configurations. One possibility is to have a pair of counter-rotating tank-tread-shaped belts, carrying a plurality of hot wire assemblies and anvil assemblies, respectively. An advantage of such an embodiment is that the opposing straight sections of the tank-tread-shaped belts can be made as long as desired, thereby providing a longer dwell time without decreasing the production rate.

In another embodiment, the film could be advanced intermittently between a hot wire assembly and an anvil assembly, which do not move in the direction in which the film is fed. The hot wire assembly and anvil assembly could then close together to sandwich the film therebetween for a period of time sufficient to sever and seal the film.

The embodiments discussed above are representative of embodiments of the present invention and are provided for illustrative purposes only. They are not intended to limit the scope of the present invention. Although components, materials, configurations, temperatures, times, etc., have been shown and described, such are not limiting. Modifications and variations are contemplated within the scope of the present invention, which is intended to be limited only by the scope of the accompanying claims.

INDUSTRIAL APPLICABILITY

The apparatus and method of the present invention are suited for severing and sealing thermoplastic film in the high-speed production of plastic bags. As the film is fed through the severing and sealing apparatus, a cutting edge implement, heated to a temperature sufficient to melt but not to burn the film, contacts the film and presses it against an opposing anvil. The film remains pinched between the cutting edge implement and the anvil for a period of time sufficient to sever and seal the film.

WE CLAIM:

1. A method of severing and sealing a film formed of a thermoplastic material, comprising the steps of:

5 heating a cutting edge implement to a temperature sufficient to melt but not to burn the thermoplastic material;
 feeding a plurality of layers of the film between the cutting edge implement and an opposing surface;
 moving the cutting edge implement and the opposing surface relative to one another to pinch the plurality of layers of film therebetween; and
 thereafter, suspending any relative lateral movement between the cutting edge implement, the film, and the opposing surface, while relatively biasing the cutting edge implement and the opposing surface together with the plurality of layers of film pinched therebetween, until the cutting edge implement cuts through the plurality of layers of film, contacts the opposing surface, and seals the plurality of layers of film together.

20 2. A method according to claim 1, wherein the moving step comprises the step of advancing the cutting edge implement in a direction substantially perpendicular relative to a contact area of the opposing surface.

25 3. A method according to claim 1, wherein the suspending step comprises synchronously moving the cutting edge implement, the film, and the opposing surface in substantially the same lateral direction.

 4. A method according to claim 1, wherein the cutting edge implement is a hot wire, and further comprising the step of, prior to the moving step, supporting the hot wire for substantially its entire effective cutting length.

30 5. A method according to claim 1, wherein the heating step comprises heating the cutting edge implement to a temperature of less than 800° F.

6. A method according to claim 1, wherein the heating step comprises heating the cutting edge implement to a temperature between about 600° F to about 800° F.

5 7. A method according to claim 1, wherein the suspending step comprises suspending relative lateral movement between the cutting edge implement, the film, and the opposing surface for approximately one second.

8. A method of severing and sealing a film, comprising the steps of:
clamping the film between opposing surfaces;
heating a cutting edge implement to a temperature sufficient to melt but not to burn the film; and
moving the cutting edge implement past one of the opposing surfaces toward the other surface so that the cutting edge implement presses against the film toward the other surface for a period of time sufficient to sever the film and seal the resulting severed edges.

9. A method according to claim 8, wherein the heating step comprises heating the cutting edge implement to a temperature of less than approximately 800° F.

10. A method according to claim 8, wherein the heating step comprises heating the cutting edge implement to a temperature between 600° F to about 800° F.

11. A method according to claim 8, wherein the cutting edge implement is a hot wire, and further comprising the step of supporting the hot wire for substantially its entire effective cutting length.

12. A method according to claim 8, wherein the passing step comprises pinching the film between the cutting edge implement and the other surface for approximately one second.

13. A method according to claim 8, wherein the passing step comprises advancing the cutting edge implement through an opening in the one opposing surface.

14. A method according to claim 8, wherein the clamping step comprises clamping the film between a rotating drum and an anvil that travels around a closed path at approximately the peripheral speed of the rotating drum.

15. An apparatus for severing and sealing a film formed of a thermoplastic material, comprising:

a cutting edge implement that is heatable to a temperature sufficient to melt but not to burn the thermoplastic material;

an anvil;

means for feeding a plurality of layers of the film between the cutting edge implement and the anvil;

means for moving the cutting edge implement and the anvil relative to one another to pinch the plurality of layers of film therebetween;

means for suspending any relative lateral movement between the cutting edge implement, the film, and the anvil, while pressing the cutting edge implement toward the anvil with the film pinched therebetween, until the cutting edge implement melts through the plurality of layers of film, contacts the anvil, and seals the plurality of layers of film together.

16. An apparatus according to claim 15, further comprising:

means for laterally moving the cutting edge implement along a closed path; and

means for moving the anvil along a path that is at least in part substantially parallel to a portion of the closed path traveled by the cutting edge implement.

17. An apparatus according to claim 16, wherein the cutting edge implement, the film, and the anvil all synchronously move in substantially the same lateral direction while the film is melted and sealed.

5 18. An apparatus according to claim 15, wherein the cutting edge implement is a hot wire that is supported for substantially its entire effective cutting length by an insulating member.

19. An apparatus according to claim 15, wherein the cutting edge implement is heated to a temperature of less than approximately 800°.

20. An apparatus according to claim 15, wherein the cutting edge implement is heated to a temperature between about 600° F to about 800° F.

15 21. An apparatus according to claim 15, wherein the cutting edge implement comprises a hot wire.

22. An apparatus according to claim 15, wherein the suspending means suspends any relative lateral movement between the cutting edge implement, the film, and the anvil for approximately one second.

23. A method of severing and sealing a film formed of a thermoplastic material, comprising:

25 pinching a plurality of layers of the film between a substrate and a cutting edge implement that is heated to a temperature sufficient to melt but not to burn the thermoplastic material; and

30 pressing the cutting edge implement toward the substrate with the plurality of layers of film pinched therebetween, until the cutting edge implement melts through the plurality of layers of film, contacts the substrate, and seals the plurality of layers of film together.

24. A method according to claim 23, further comprising the step of feeding the plurality of layers of film in a lateral direction, and synchronously moving the substrate and the cutting edge implement in the lateral direction during the pinching and pressing steps.

5

25. A method according to claim 23, further comprising, prior to the pinching step, heating the cutting edge implement to the sufficient temperature.

26. A method according to claim 23, wherein the cutting edge implement is a hot wire, and further comprising the step of, prior to the pinching and pressing steps, supporting the hot wire for substantially its entire effective cutting length.

10
15
20
25
30
35
40
45
50
55
60
65
70
75
80
85
90
95
100

A method of severing and sealing a film formed of a thermoplastic material includes heating a cutting edge implement to a temperature sufficient to melt but not to burn the thermoplastic material, feeding a plurality of layers of the film between the cutting edge implement and an opposing surface, and moving the cutting edge implement, which is preferably a supported hot wire, and the opposing surface relative to one another to pinch the plurality of layers of film therebetween.

Thereafter, any relative lateral movement between the cutting edge implement, the film, and the opposing surface is suspended, while the cutting edge implement and the opposing surface are relatively biased together with the plurality of layers of film pinched therebetween, until the cutting edge implement cuts through the plurality of layers of film, contacts the opposing surface, and seals the plurality of layers of film together.

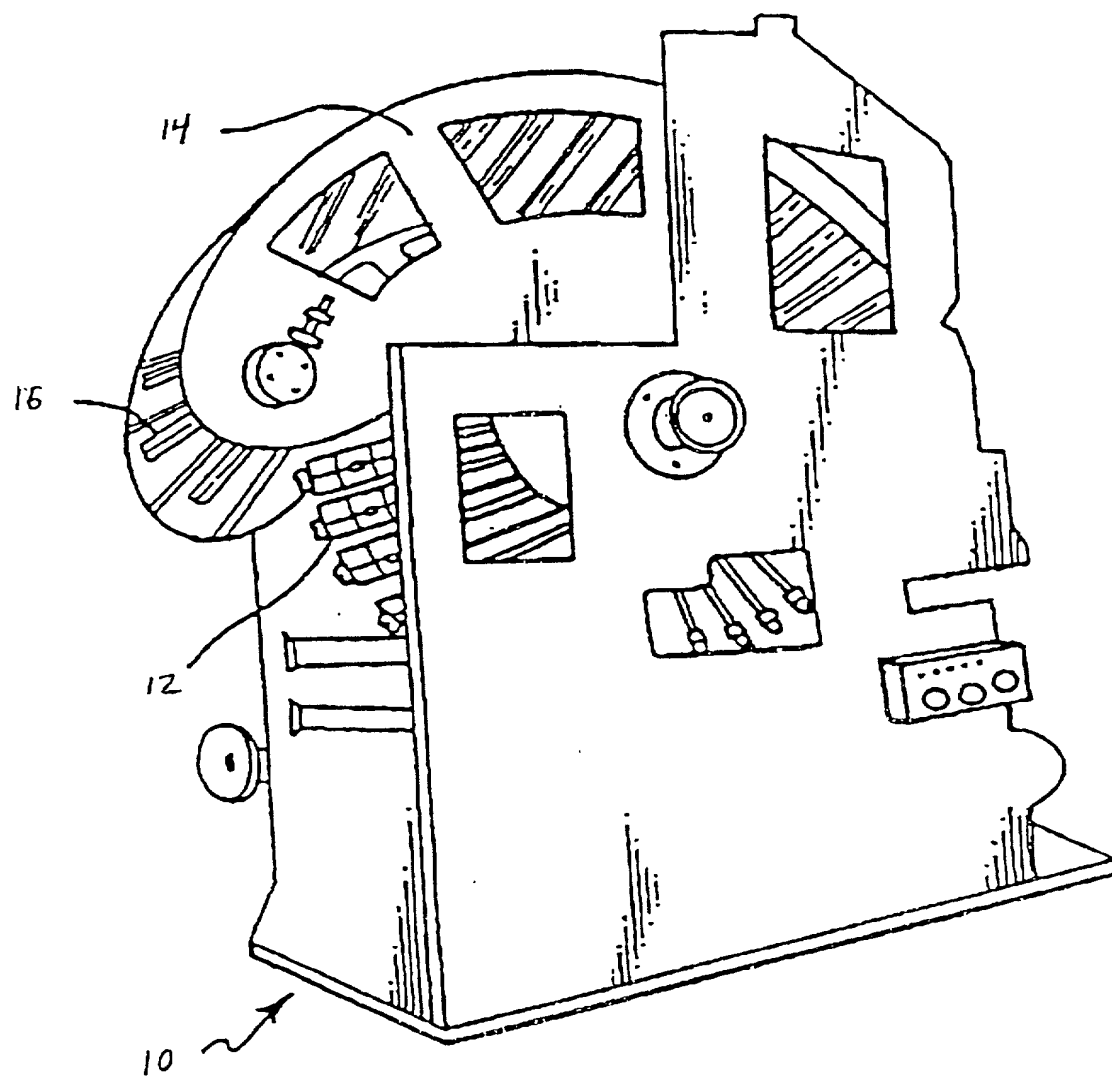
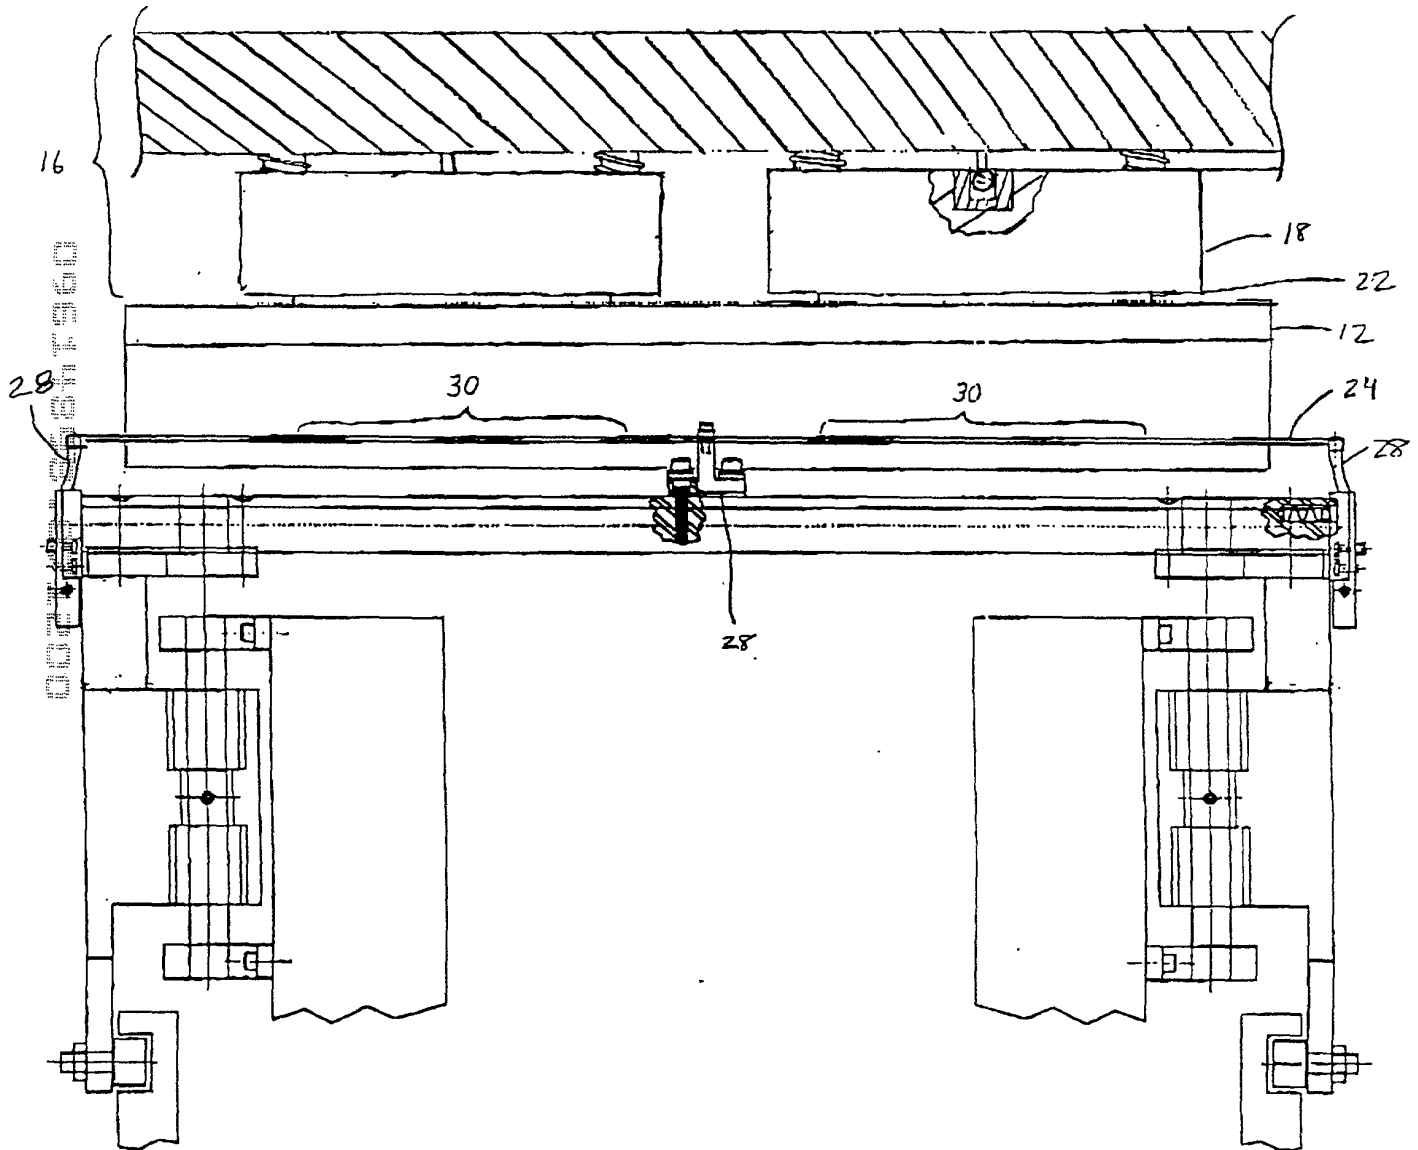


FIG. 1

FIG. 3



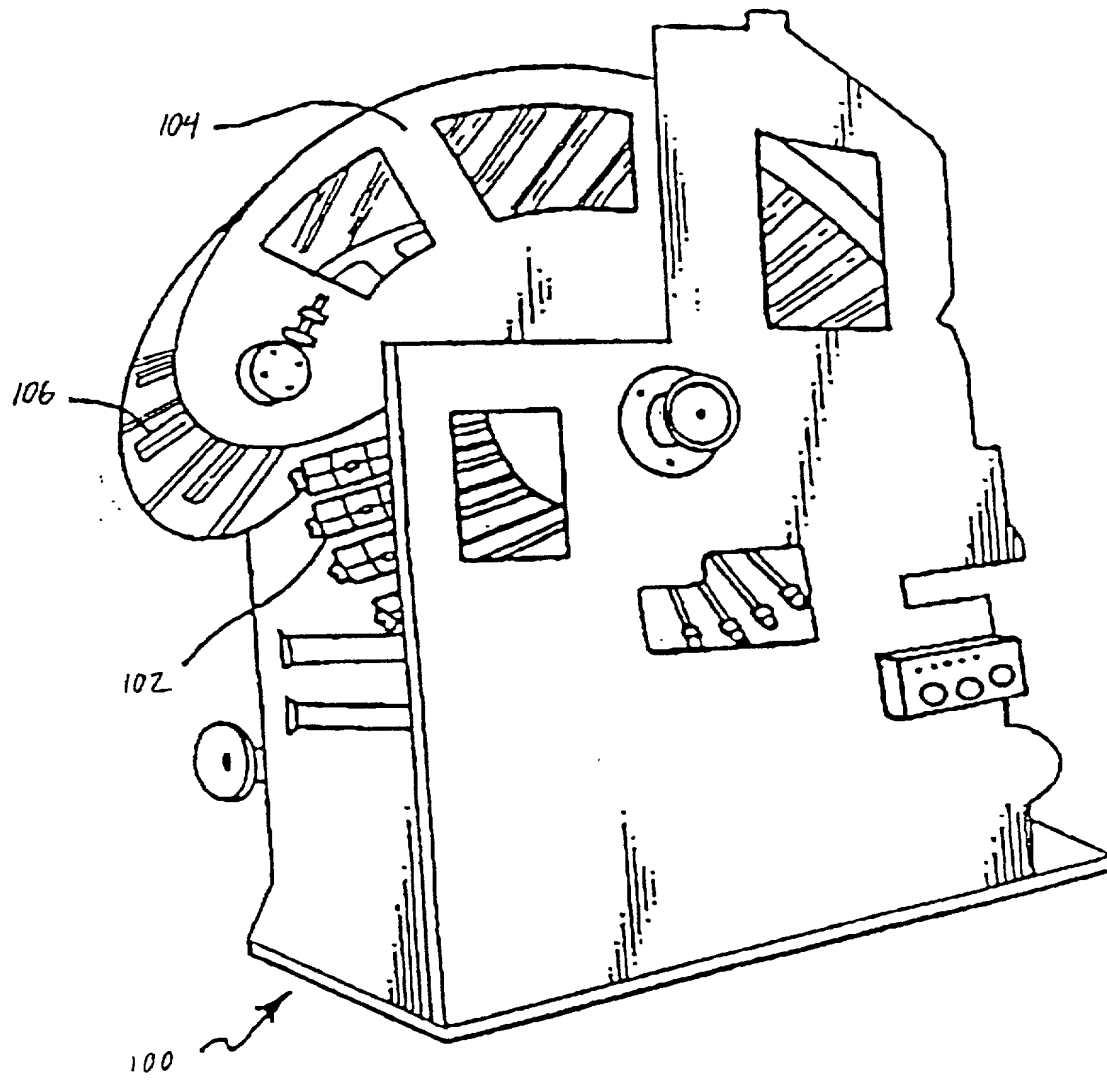


FIG. 4


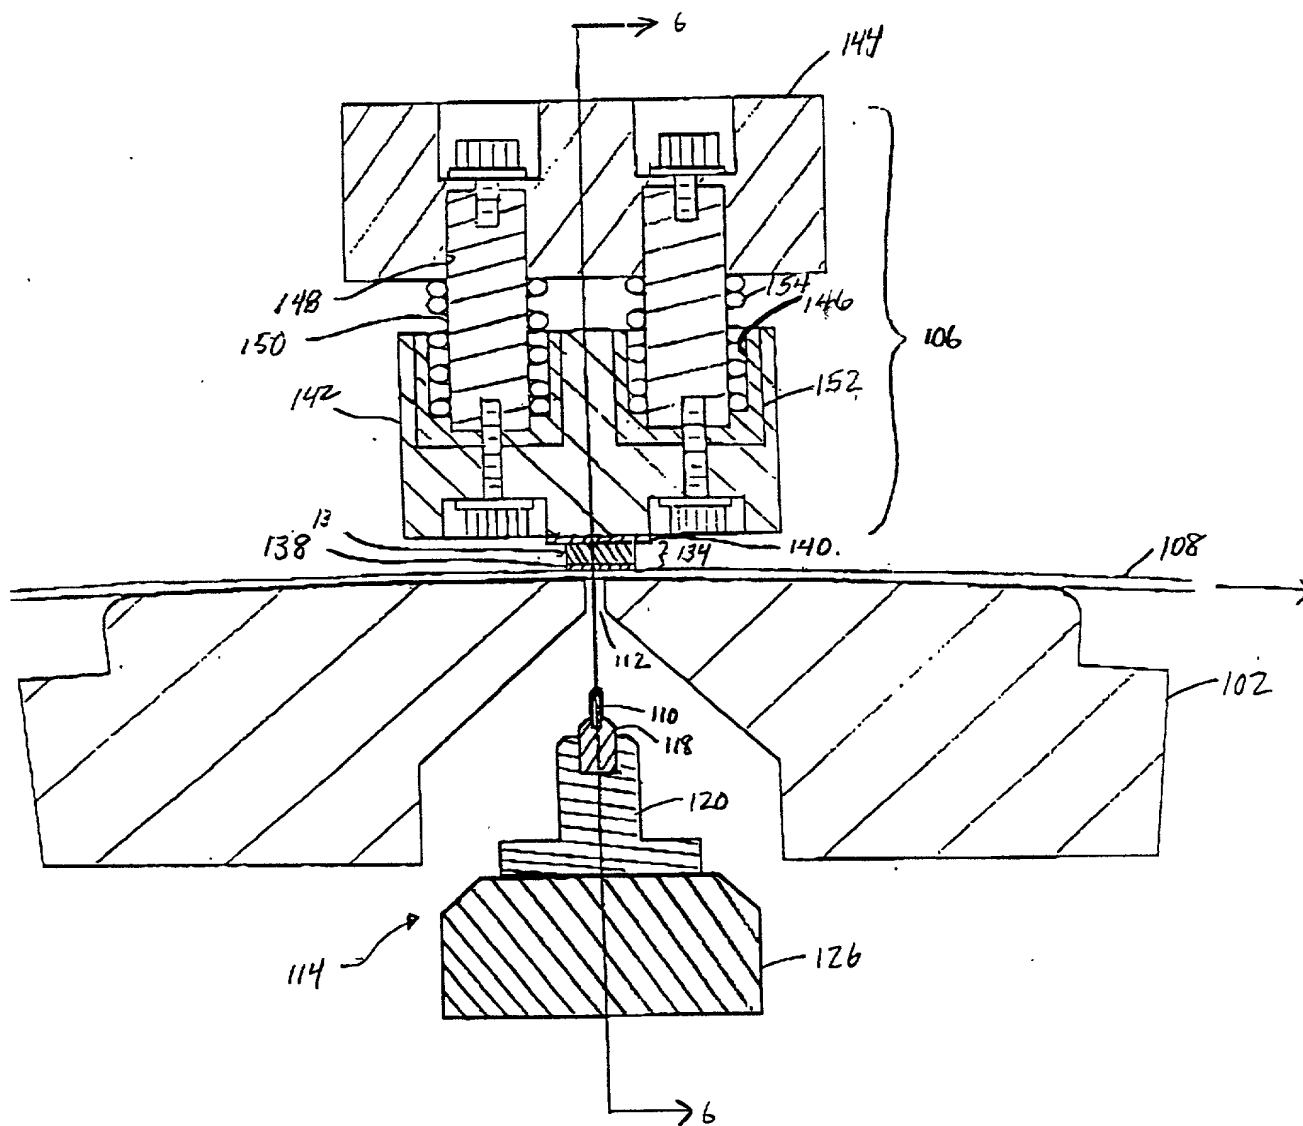


FIG. 5

FIG. 6

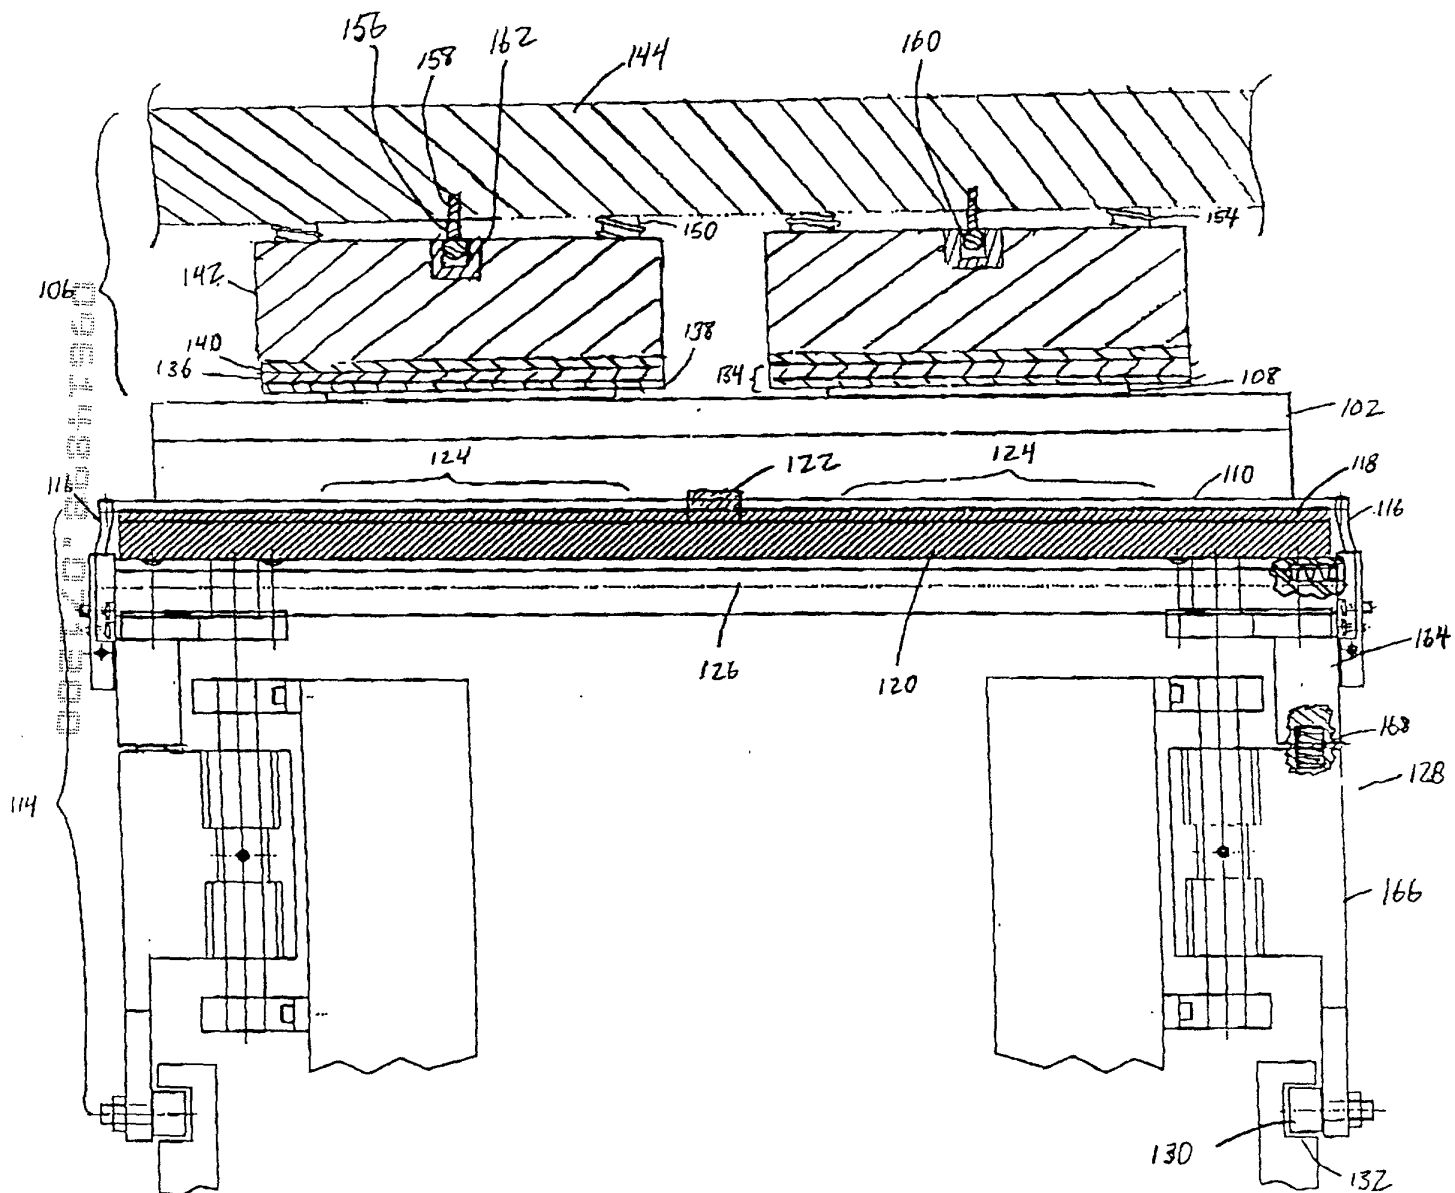

COMBINED DECLARATION AND POWER OF
ATTORNEY FOR PATENT APPLICATION

As a below named inventor, we hereby declare that:

Our residence, post office address and citizenship are as stated below next to our name:

We believe we are the original, first and sole inventor (if only one name is listed herein) or an original, first and joint inventor (if plural names are listed herein) of the subject matter which is claimed and for which a patent is sought in the invention APPARATUS FOR AND METHOD OF SEVERING AND SEALING THERMOPLASTIC FILM which is being filed herewith.

We hereby state that we have reviewed and understand the contents of the above identified specification, including the claims.

We acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a).

We hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Country	Appln. No.	Filed (Day/Mo/Yr.)	Priority Claimed (Yes/No)
---------	------------	-----------------------	------------------------------

We hereby appoint J. William Frank, III (Reg. No. 25,626), David J. Houser (Reg. No. 29,172) or Laura L. Bozek (Reg. No. 38,085), Kristin L. Chapman (Reg. No. 38,102) and Robert A. Miller (Reg. No. 26,956) as our attorneys to prosecute this application and to transact all business in the Patent and Trademark Office connected herewith.

Address all correspondence to:

S. C. JOHNSON HOME STORAGE, INC..
Patent Section - M.S. 077
1525 Howe Street
Racine, WI 53403
Telephone: (262) 260-2722

[illegible]


J-2850

Page 2

Full Name of Sole or First Inventor: Clark Woody
 Inventor's Signature: *Clark Woody*
 Date: 7/16/00 Citizen Subject of: U.S.A.
 Residence: 1585 North Mackinaw Road, Pinconning, MI 48650
 Post Office Address: c/o S. C. Johnson Home Storage, Inc., 1525 Howe Street, MS077,
 Racine, WI 53403-2236

Full Name of third Inventor: P. Gregory Velez
 Inventor's Signature: X [Signature]
 Date: X 7/10/00 Citizen Subject of: U.S.A.
 Residence: 5143 Gatesboro Drive, South, Saginaw, MI 48603
 Post Office Address: c/o S. C. Johnson Home Storage, Inc., 1525 Howe Street, MS077,
Racine, WI 53403-2236

Full Name of third Inventor: Jeffrey S. Hoffman
 Inventor's Signature: X *Jeffrey S. Hoffman*
 Date: X 5/10/10 Citizen Subject of: U.S.A.
 Residence: 866 West Prevo Road, Linwood, MI 48634
 Post Office Address: co S. C. Johnson Home Storage, Inc., 1525 Howe Street, MS077,
 Racine, WI 53403-2236

Full Name of second Inventor: Stephen P. Gangler
 Inventor's Signature: X 
 Date: X 7/16/00 Citizen Subject of: U.S.A.
 Residence: 7020 Forest Road, Unionville, MI 48767
 Post Office Address: c/o S. C. Johnson Home Storage, Inc., 1525 Howe Street, MS077,
 Racine, WI 53403-2236